


Height:

- A - Overall
38" [96.5cm]
- B - Ground to Bottom of Lip
32" [81.3cm]
- C - Ground to Bottom of Cabinet
4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 75.25" [191CM]

*INTERNAL ELECTRICAL STUB-UP


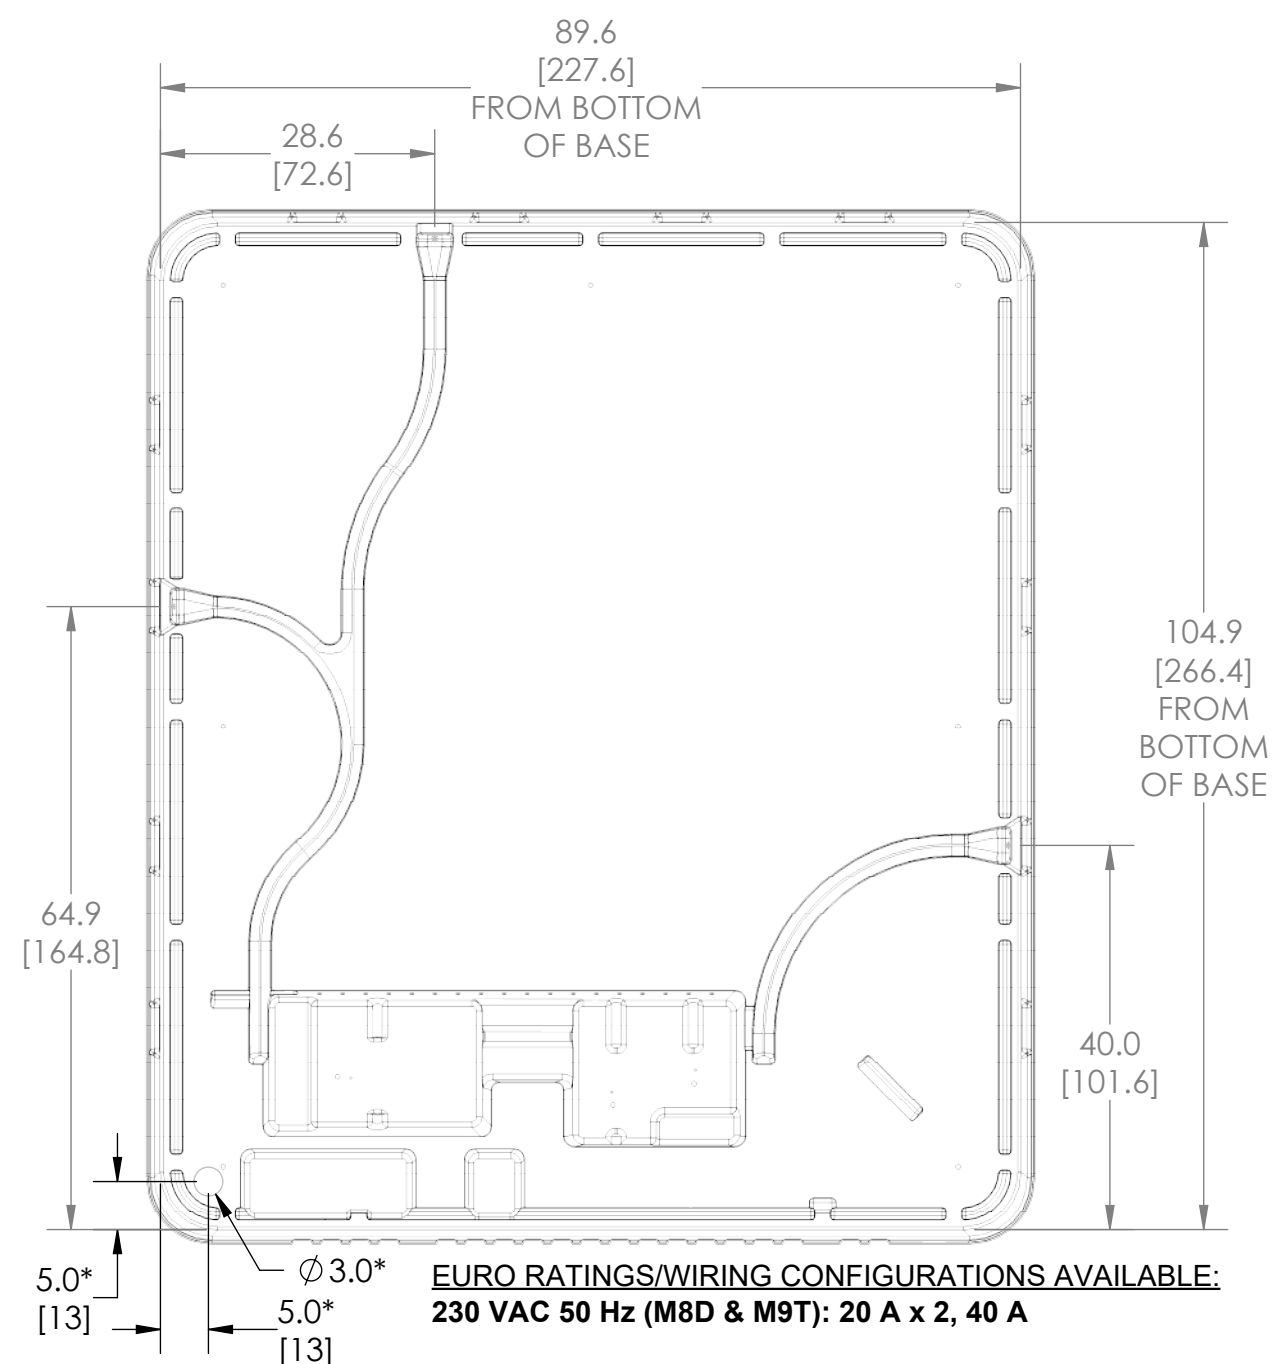


EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:
230 VAC 50 Hz (M8D & M9T): 20 A x 2, 40 A

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:
240 VAC, 60 Hz, 50 A
240 VAC, 60 Hz, 60 A

NOTE: SPA MODELS WITH 3 JET PUMPS (A9L, M8, M9L) REQUIRE A 60 AMP SERVICE FOR FULL FUNCTIONALITY. THESE MODELS MAY ALTERNATIVELY BE OPERATED WITH VARIOUS ELECTRICAL CONFIGURATIONS, HOWEVER, CERTAIN SET-UPS MAY RESULT IN OPERATION LIMITATIONS. RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. CONTACT YOUR DEALER FOR DETAILS.

A9L

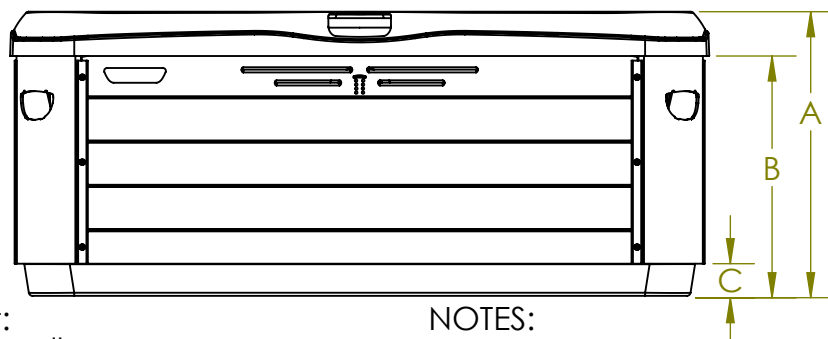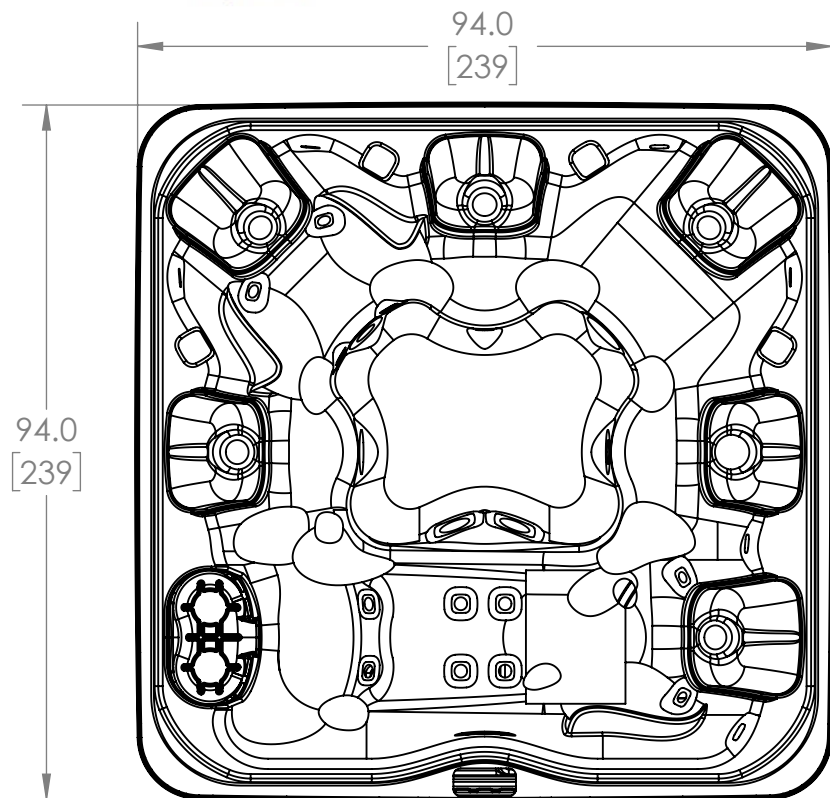


Height:
 A - Overall
 38" [96.5cm]
 B - Ground to Bottom of Lip
 32" [81.3cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON
 THE FRONT OF THE SPA WITH THE
 FOLLOWING SPAN: 75.25" [191]

*INTERNAL ELECTRICAL STUB-UP

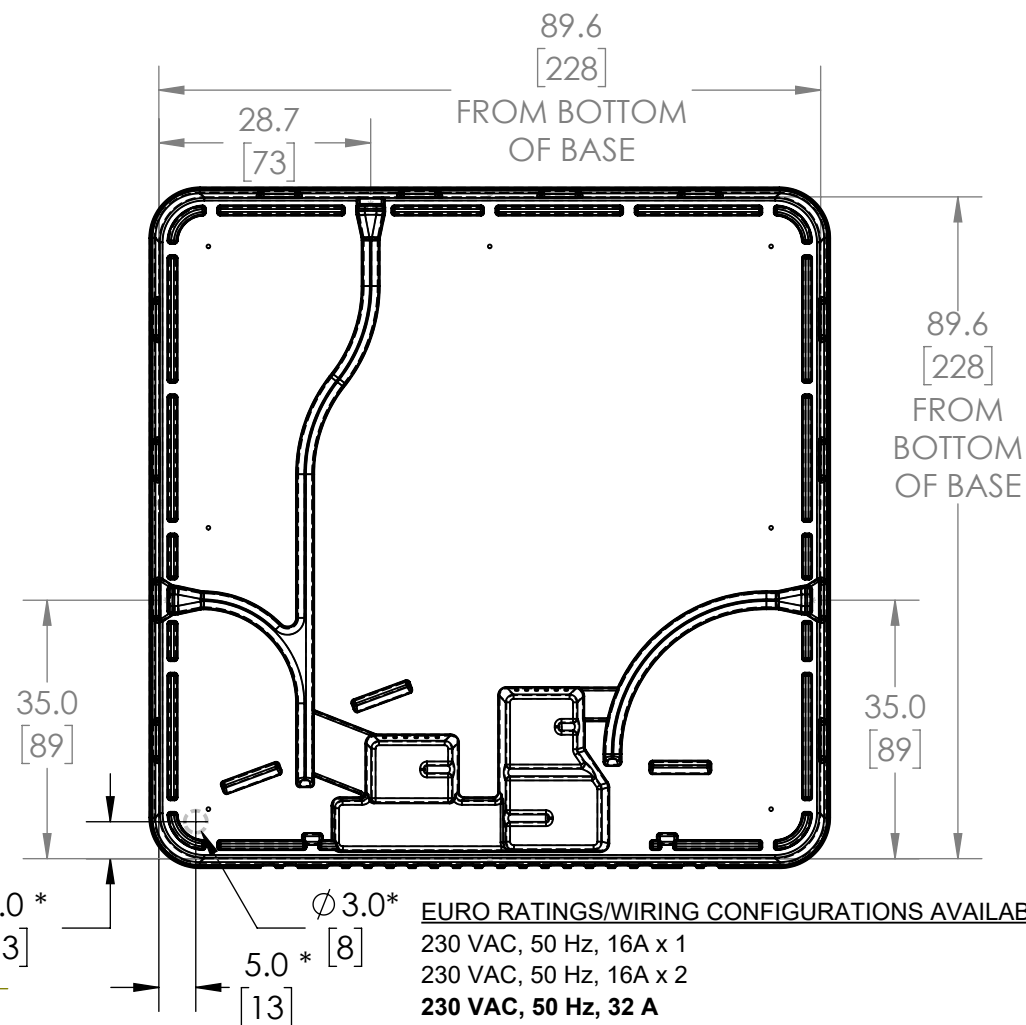

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:



230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE
 PREFERRED FULL FUNCTIONALITY SETUPS. OTHER
 SET-UPS MAY RESULT IN OPERATION LIMITATIONS.
 CONTACT YOUR DEALER FOR DETAILS.

A8L/R8L/X8L

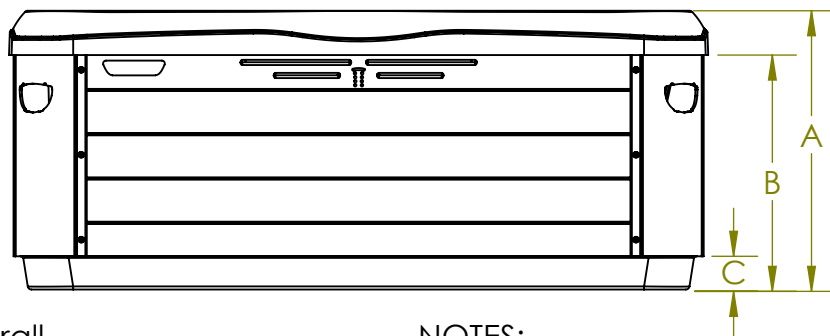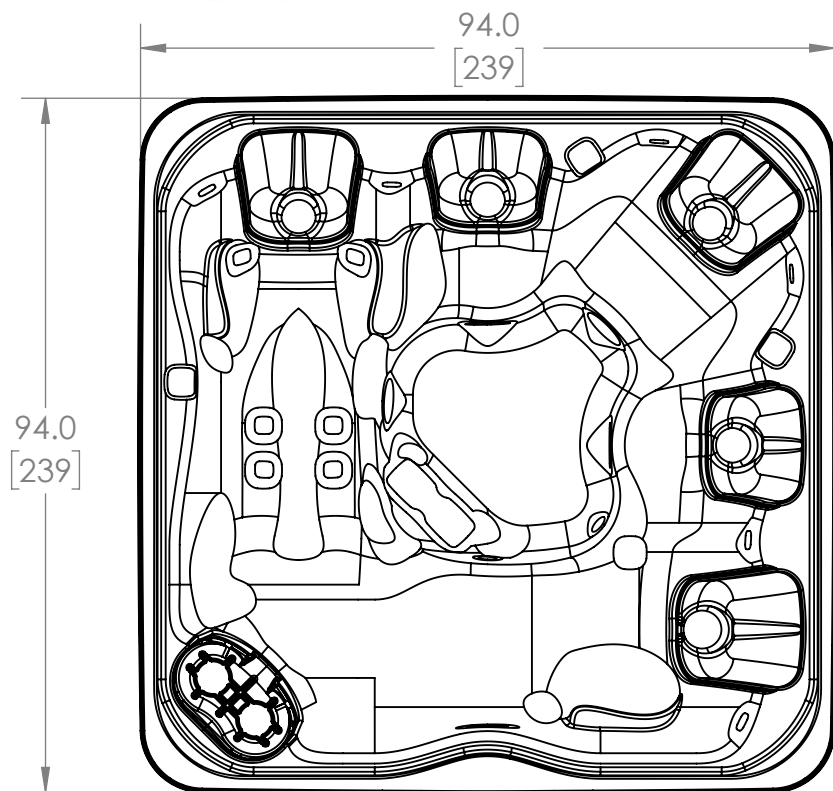


Height:
 A - Overall
 38" [96.5cm]
 B - Ground to Bottom of Lip
 32" [81.3cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 75.25" [191]

*INTERNAL ELECTRICAL STUB-UP

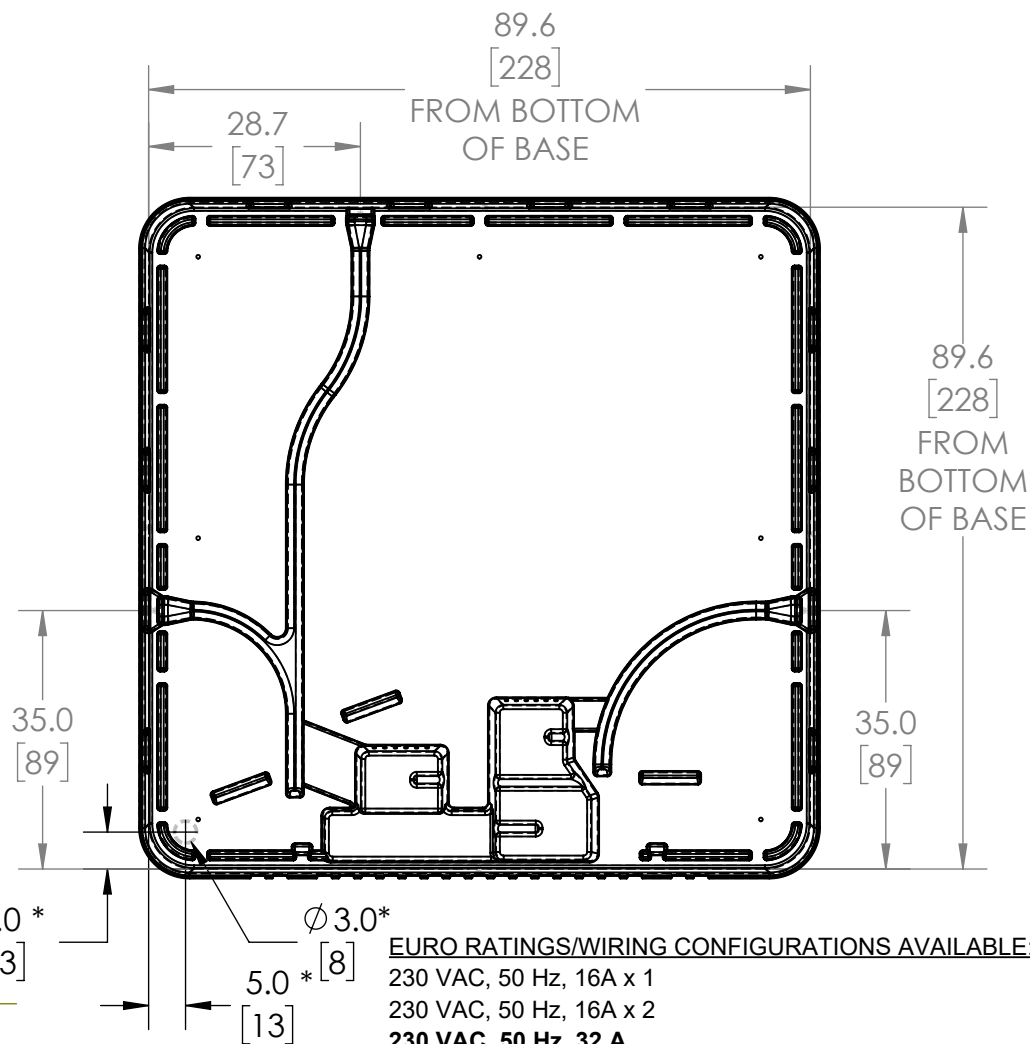

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:



230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

A8D

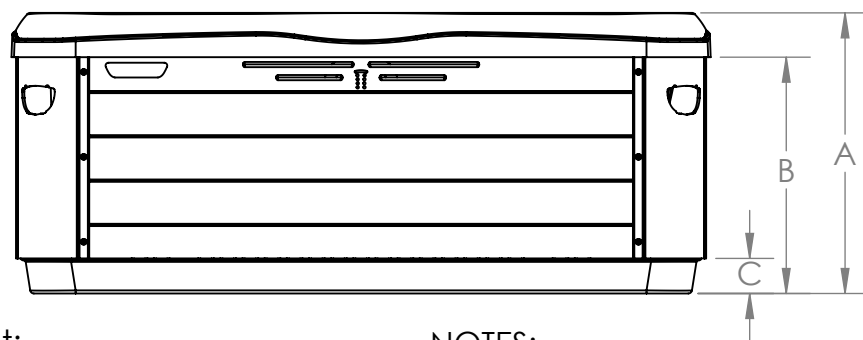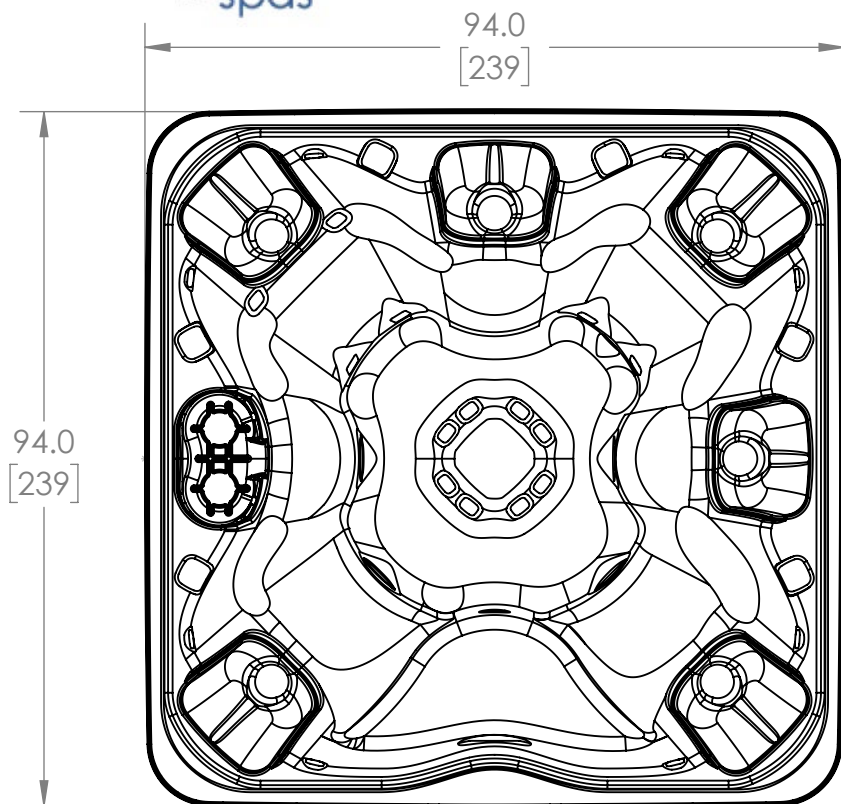


Height:
 A - Overall
 38" [96.5cm]
 B - Ground to Bottom of Lip
 32" [81.3cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 75.25" [191]

*INTERNAL ELECTRICAL STUB-UP

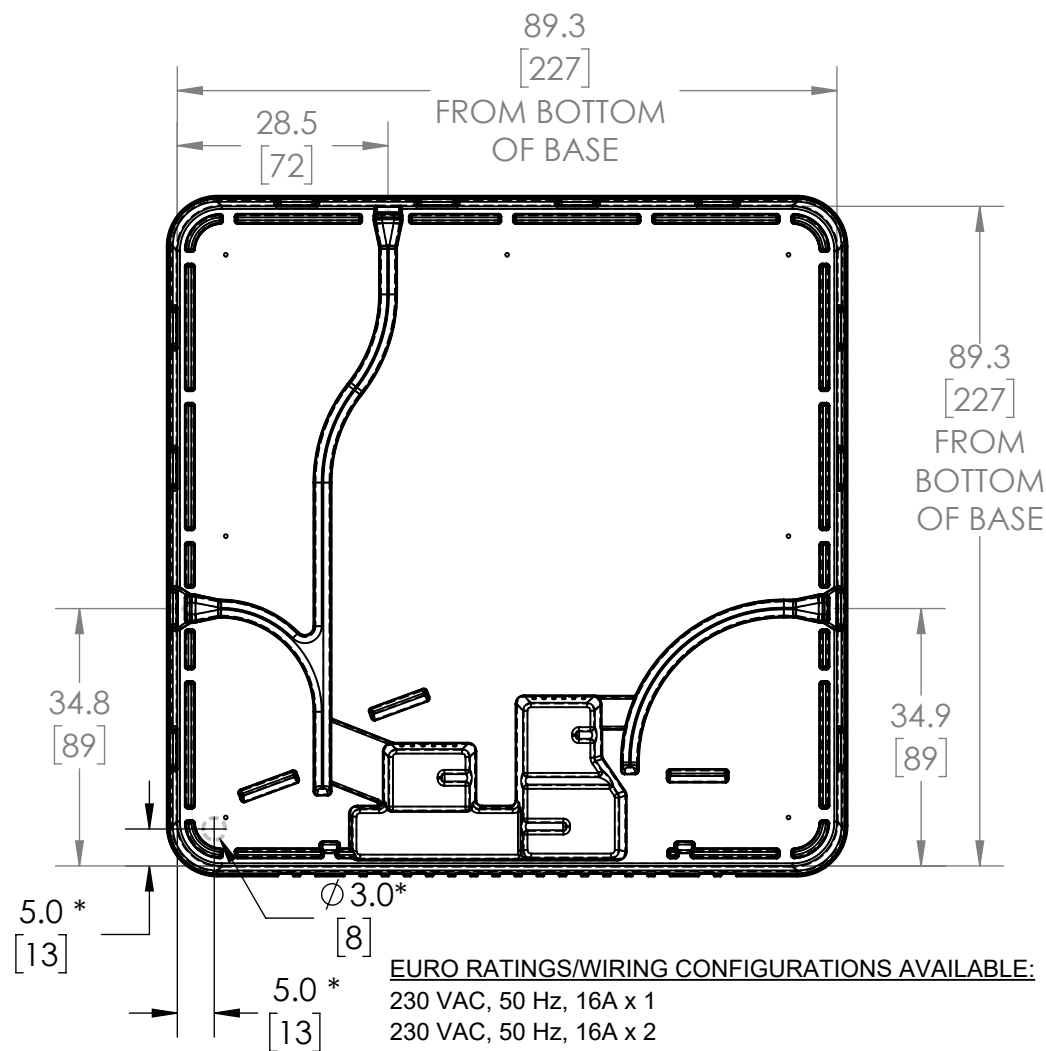

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1

230 VAC, 50 Hz, 16A x 2

230 VAC, 50 Hz, 32 A

400 VAC, 50 Hz, 16 A x 3 (3 phase)



US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A

240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

A8/R8/X8

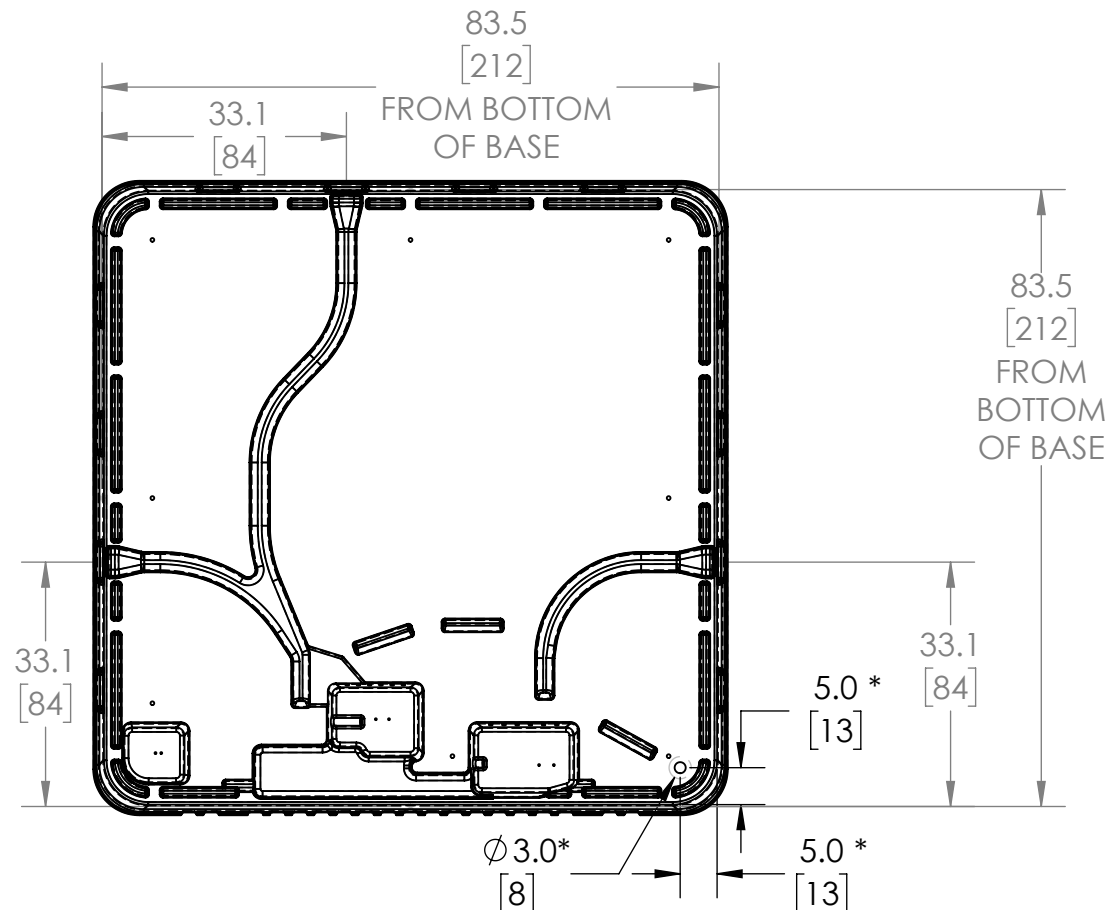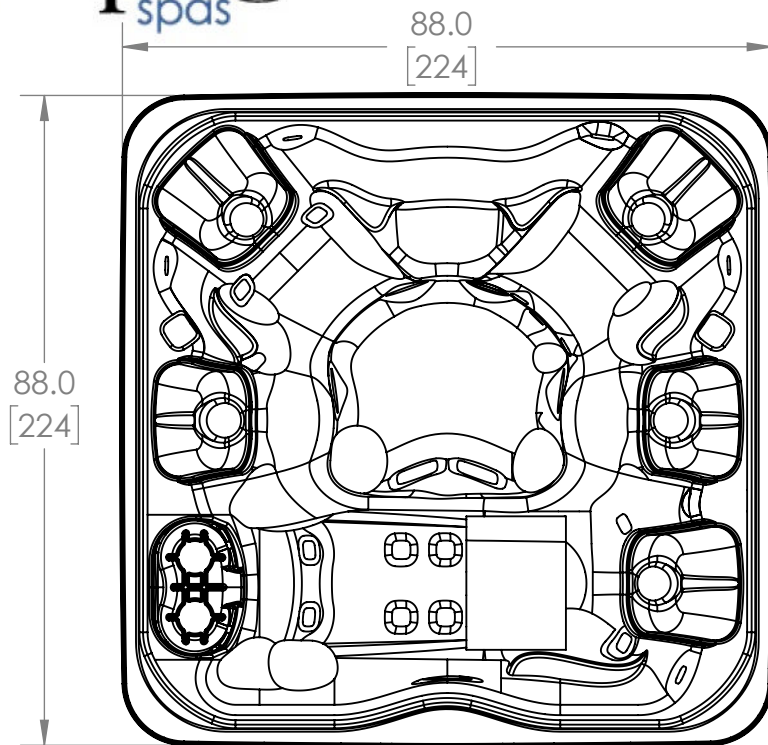


EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

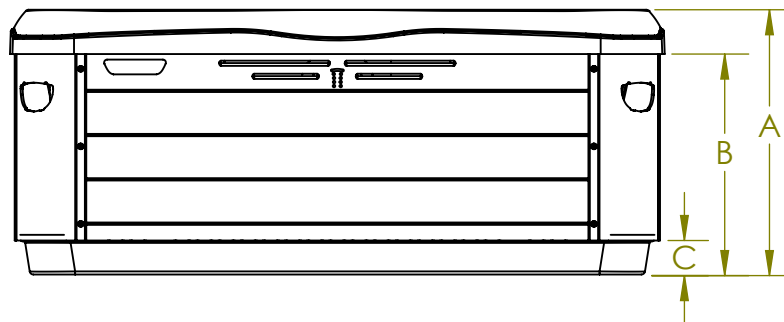




Height:
 A - Overall
 36" [91.4cm]
 B - Ground to Bottom of Lip
 30" [76.2cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 69.25" [176]

*INTERNAL ELECTRICAL STUB-UP TYPICAL

A7L/R7L/X7L

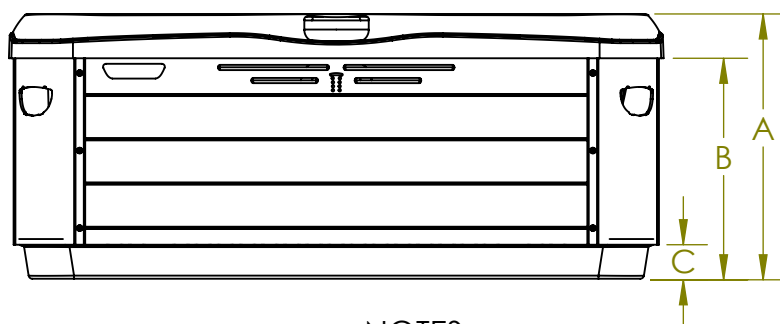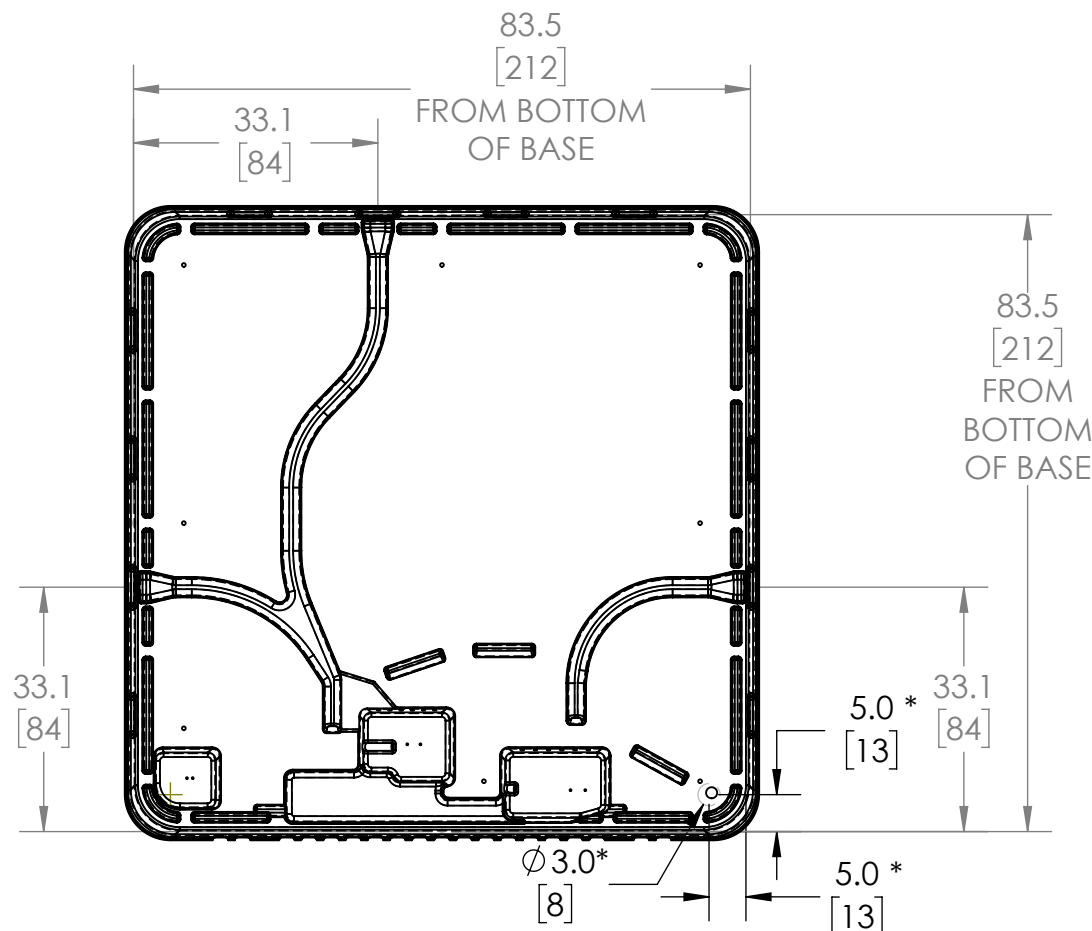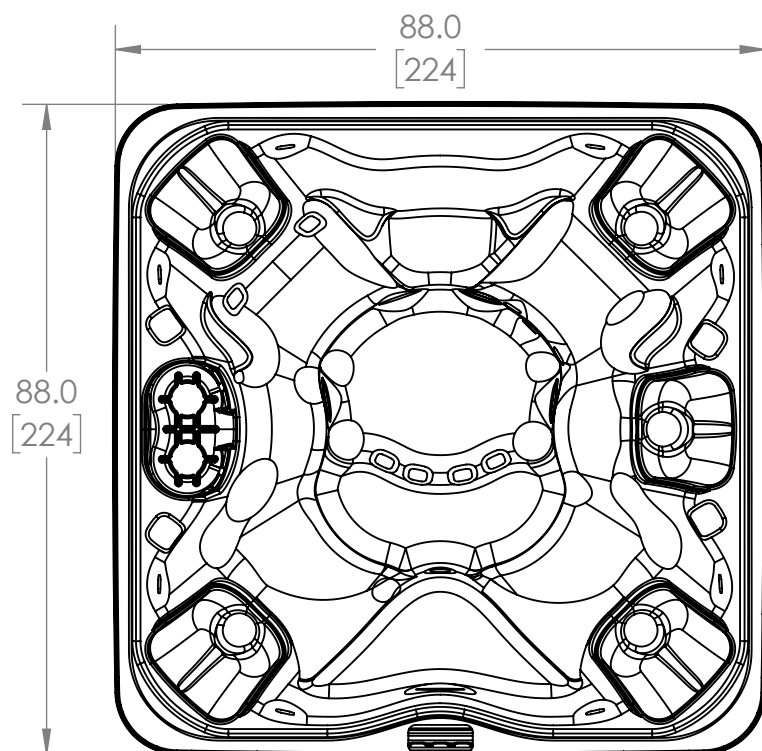

Height:
 A - Overall
 36" [91.4cm]
 B - Ground to Bottom of Lip
 30" [76.2cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 69.25" [176]

*INTERNAL ELECTRICAL STUB-UP TYPICAL

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)



US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

A7/R7/X7

bullfrog
spas

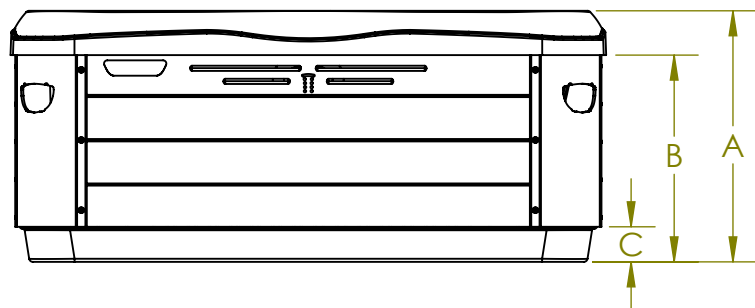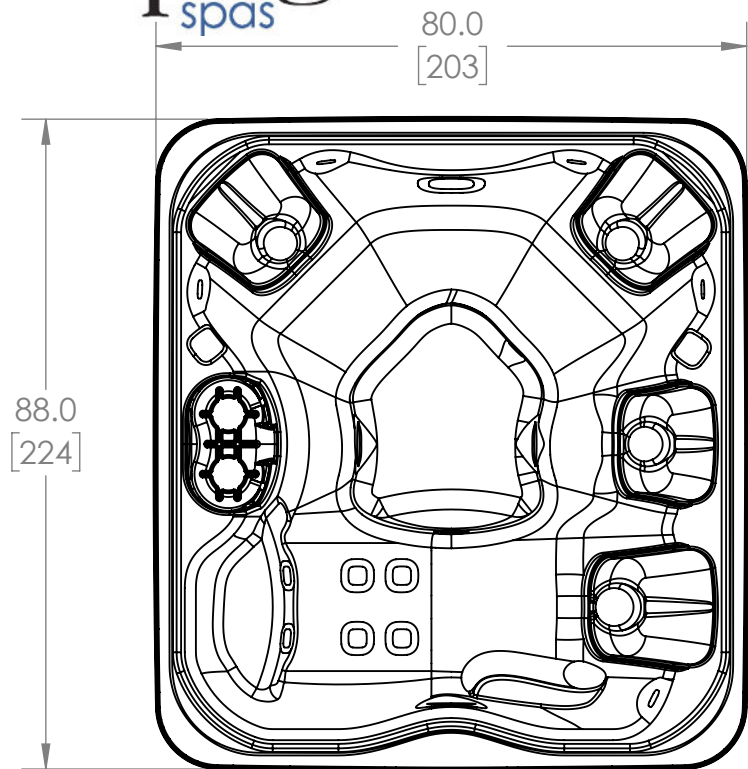

Height:

A - Overall

34" [86.4cm]

B - Ground to Bottom of Lip

28" [71.1cm]


C - Ground to Bottom of Cabinet

4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 61.3" [155.6]

*INTERNAL ELECTRICAL STUB-UP

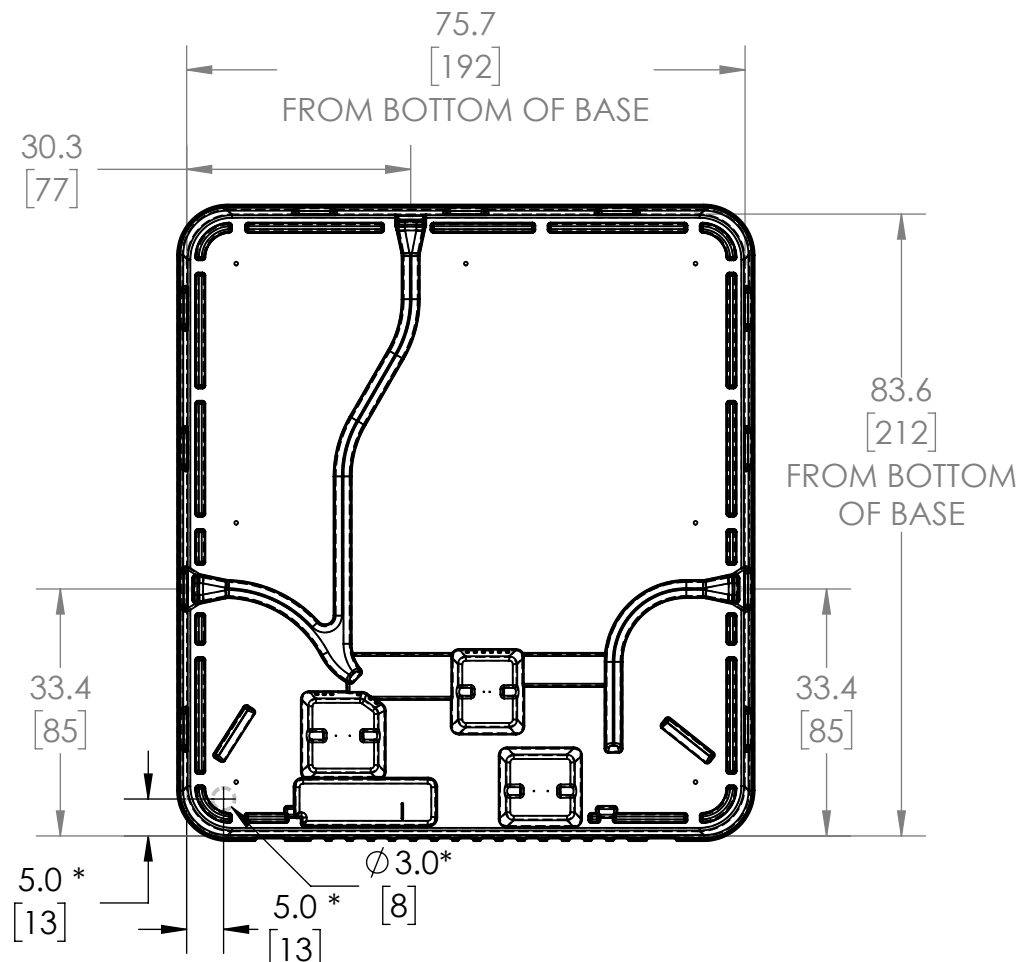

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1

230 VAC, 50 Hz, 16A x 2

230 VAC, 50 Hz, 32 A

400 VAC, 50 Hz, 16 A x 3 (3 phase)




US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A

240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. CONTACT YOUR DEALER FOR DETAILS.

A6L/R6L/X6L

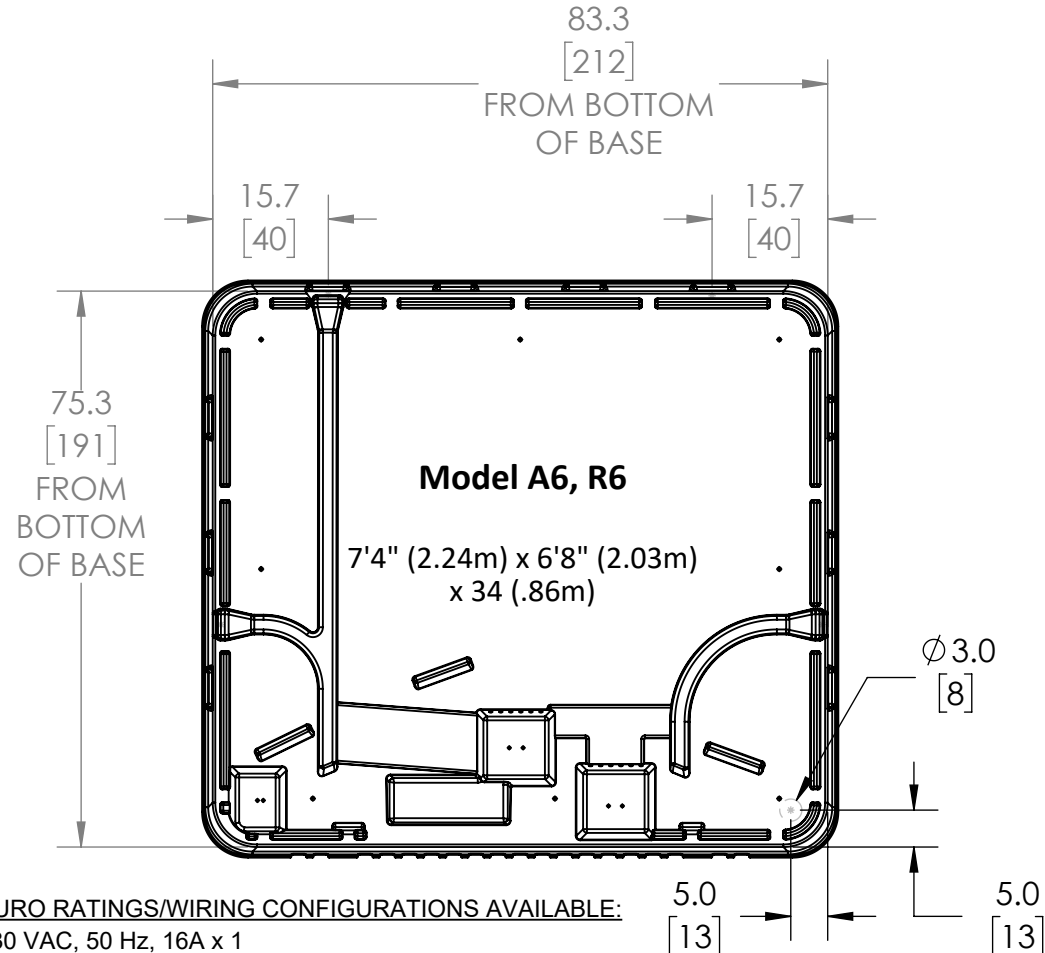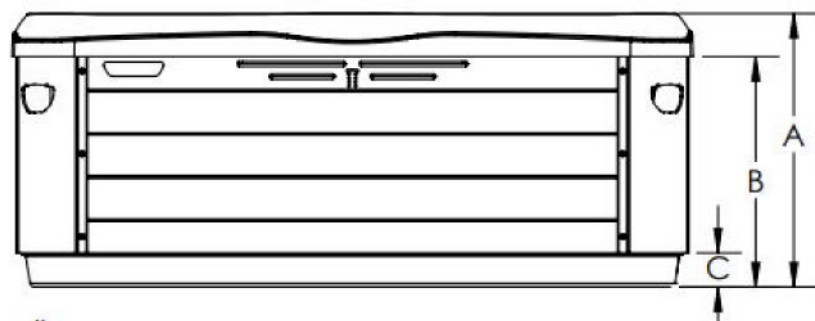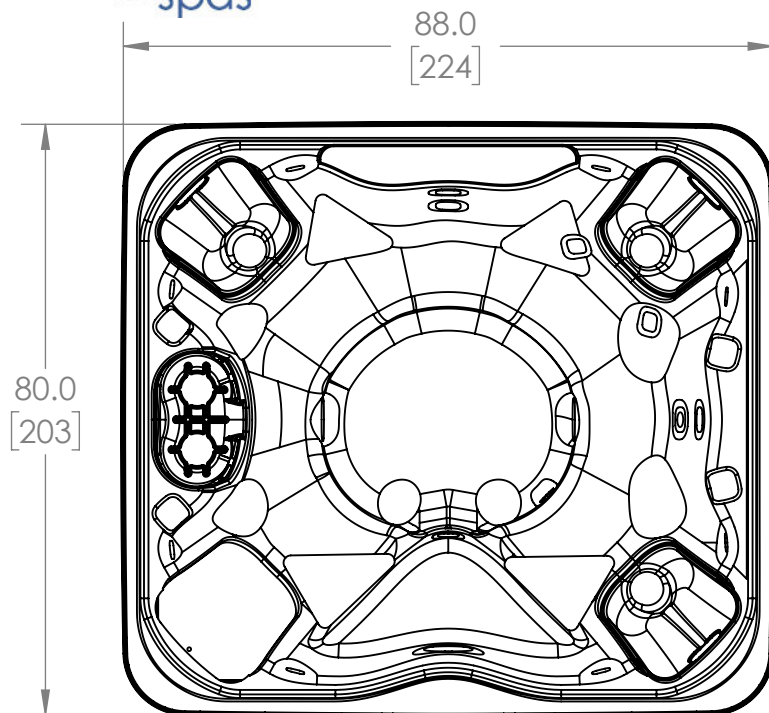

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.



Height:
 A - Overall
 34" [86.4cm]
 B - Ground to Bottom of Lip
 28" [71.1cm]
 C - Ground to Bottom of Cabinet
 4 3/4" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 69.25" [175.9]

*INTERNAL ELECTRICAL STUB-UP

A6/R6

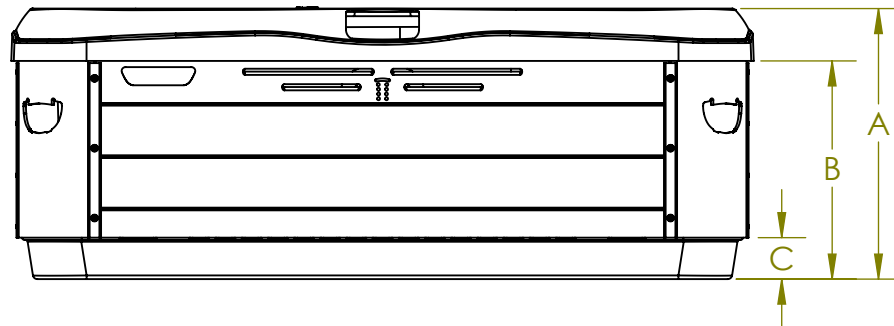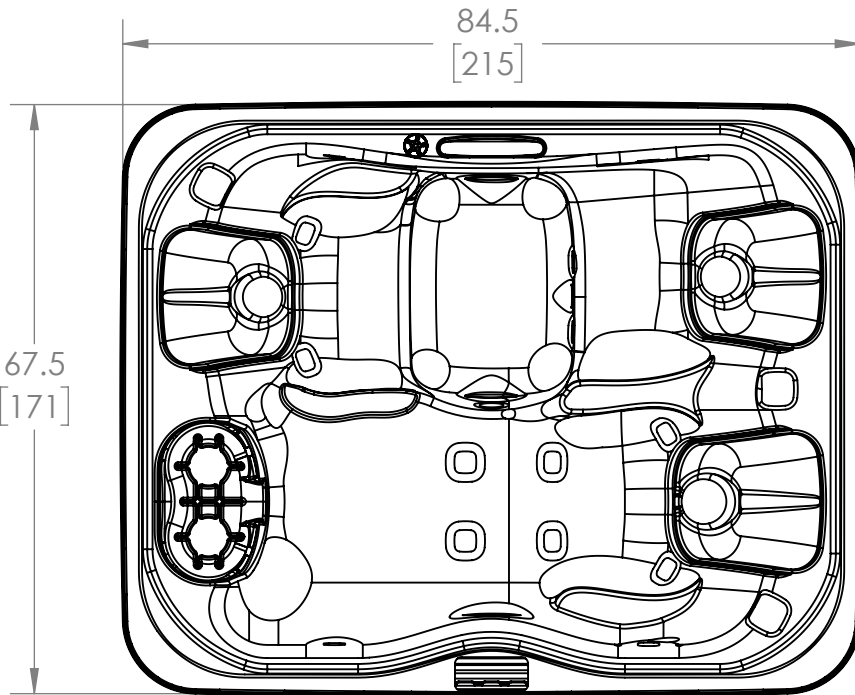


Height:
 A - Overall
 31" [78.7cm]
 B - Ground to Bottom of Lip
 25" [63.5cm]
 C - Ground to Bottom of Cabinet
 4.75" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN:
 65.75" [167.0cm]

*INTERNAL ELECTRICAL STUB-UP

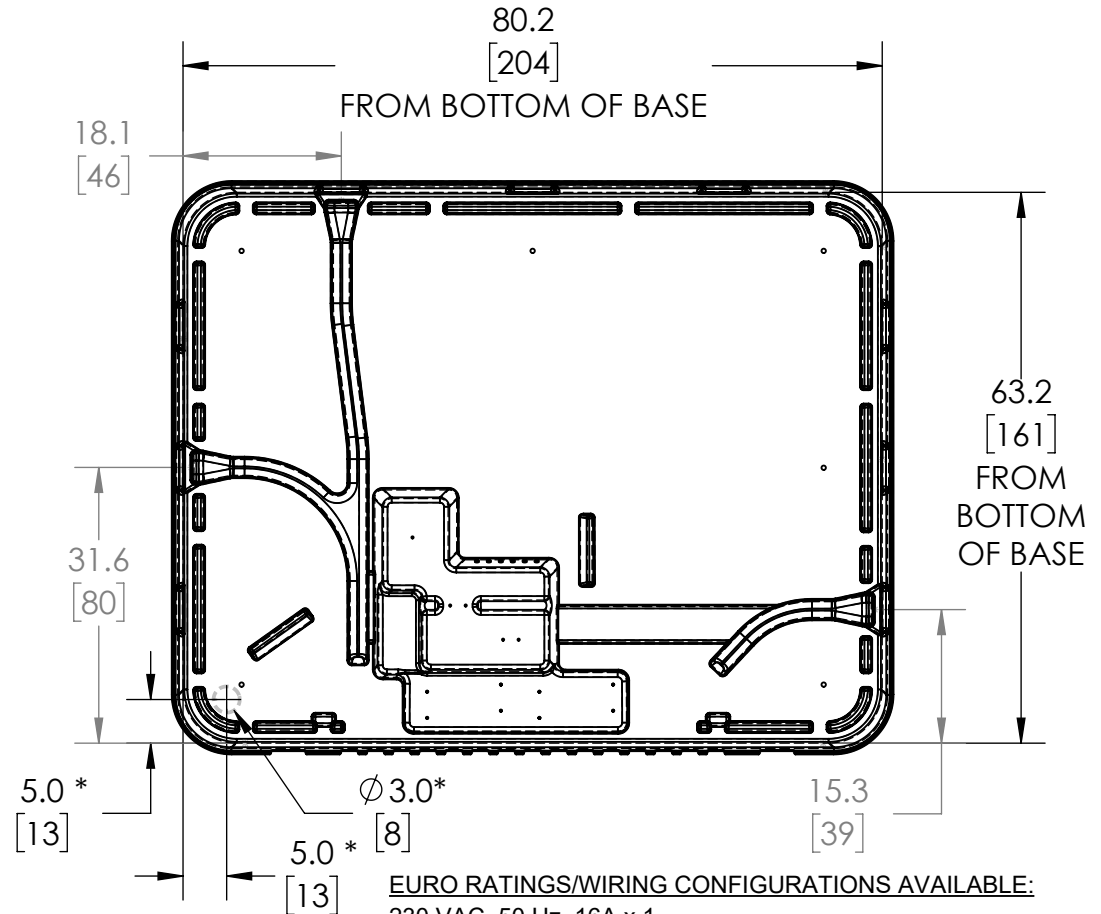

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:




230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

120 VAC, 60Hz, 20 A
 240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

A5L/R5L/X5L

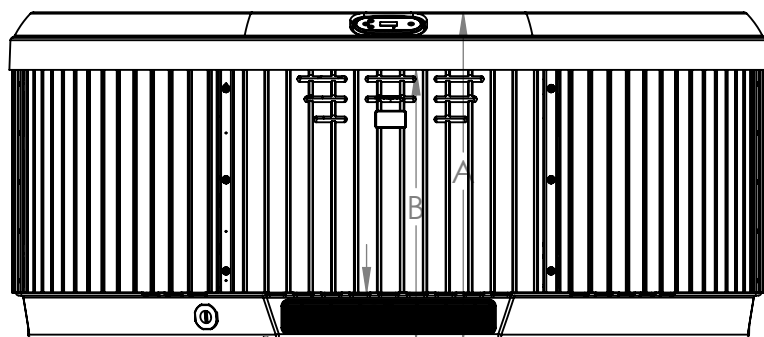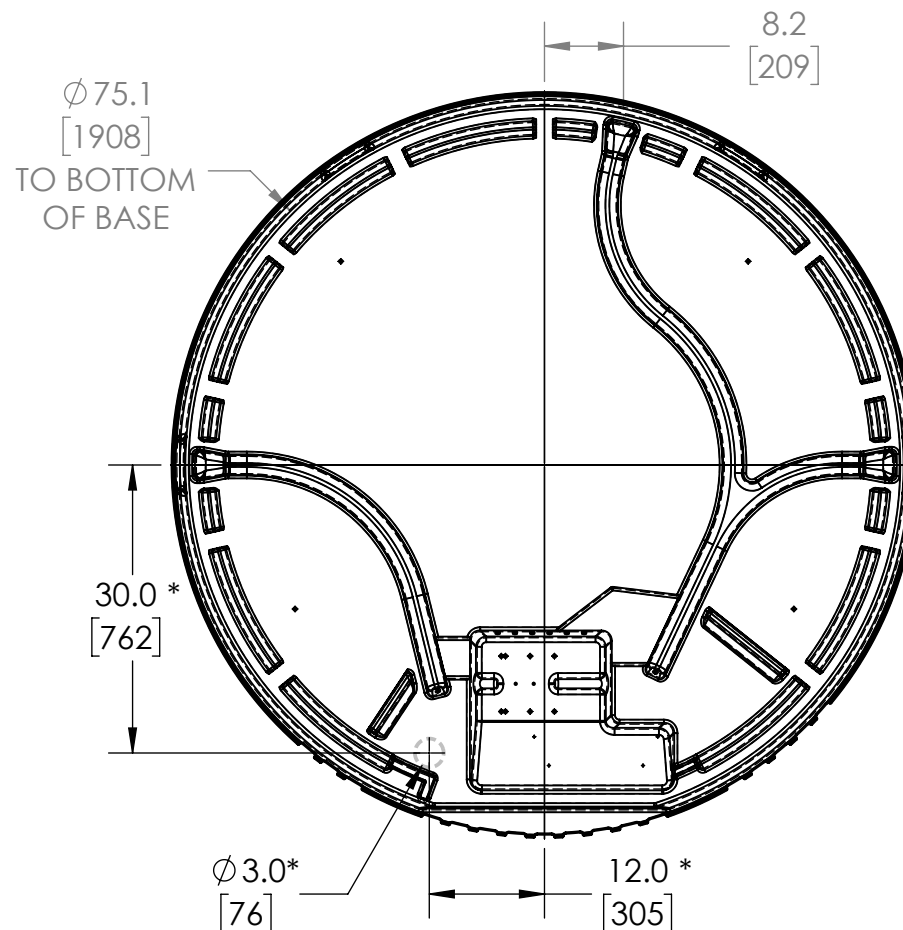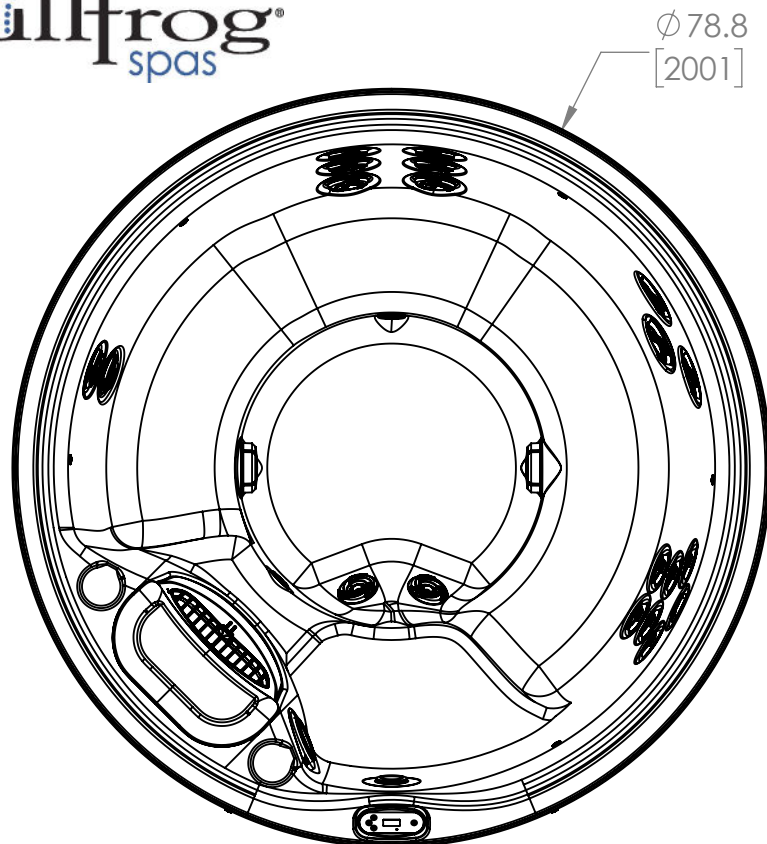

Height:

- A - Overall
34" (86.4cm)
- B - Ground to Bottom of Lip
28" (71.1cm)
- C - Ground to Bottom of Cabinet
4.8" (12.2cm)

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 33.5" (85cm)

*INTERNAL ELECTRICAL STUB-UP

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1
 230 VAC, 50 Hz, 16A x 2
230 VAC, 50 Hz, 32 A
400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

120 VAC, 60HZ, 20 A
 240 VAC, 60Hz, 30 A
240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

X6R