


Height:
 A - Overall
 34" [86.4cm]
 B - Ground to Bottom of Lip
 32" [81.3cm]
 C - Ground to Bottom of Cabinet
 4.69" [12cm]

NOTES:

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 83.5" [212cm]

*INTERNAL ELECTRICAL STUB-UP

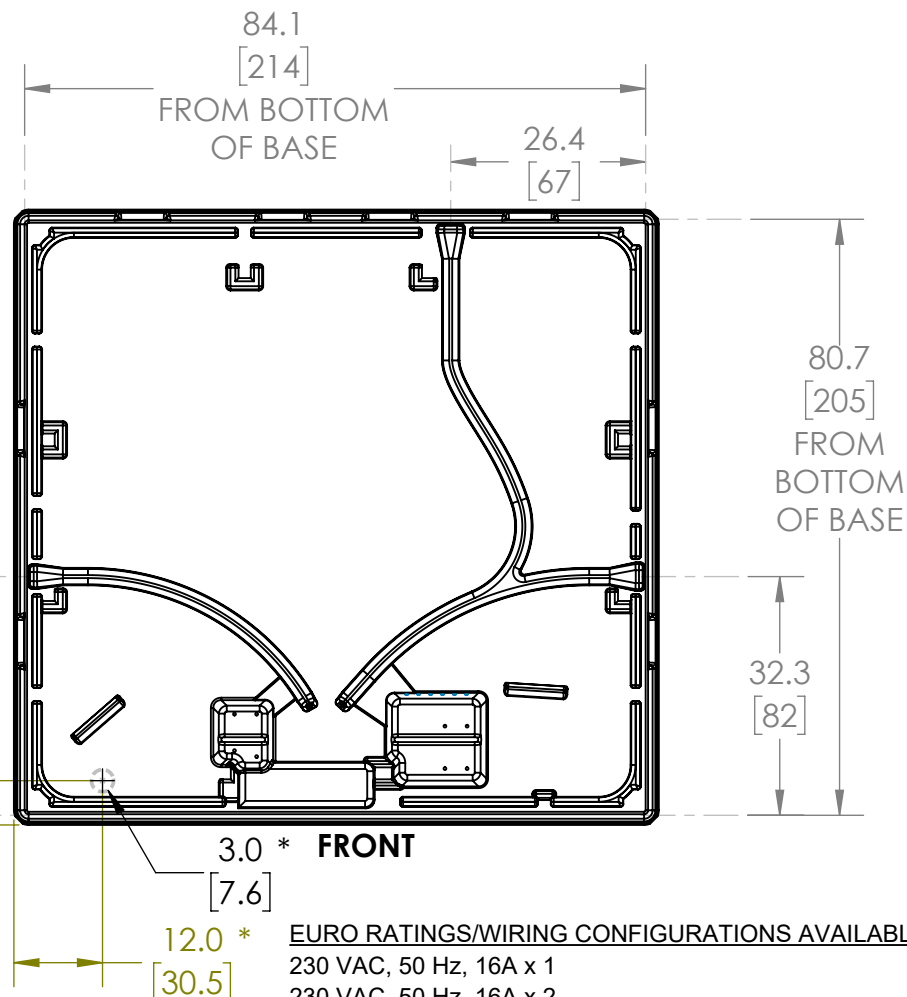

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1

230 VAC, 50 Hz, 16A x 2

230 VAC, 50 Hz, 32 A

400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:




240 VAC, 60Hz, 30 A

240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

STIL 7

bullfrog
spas

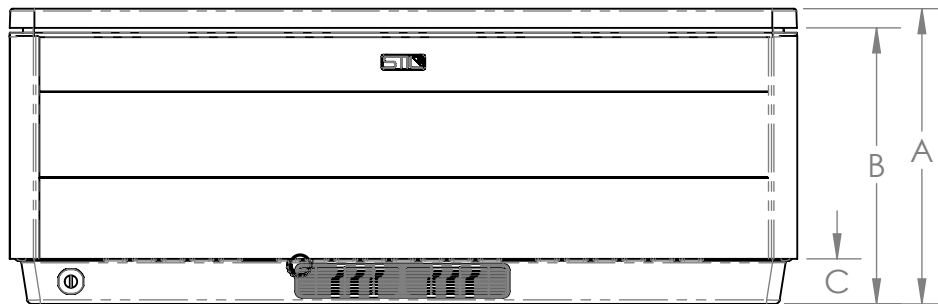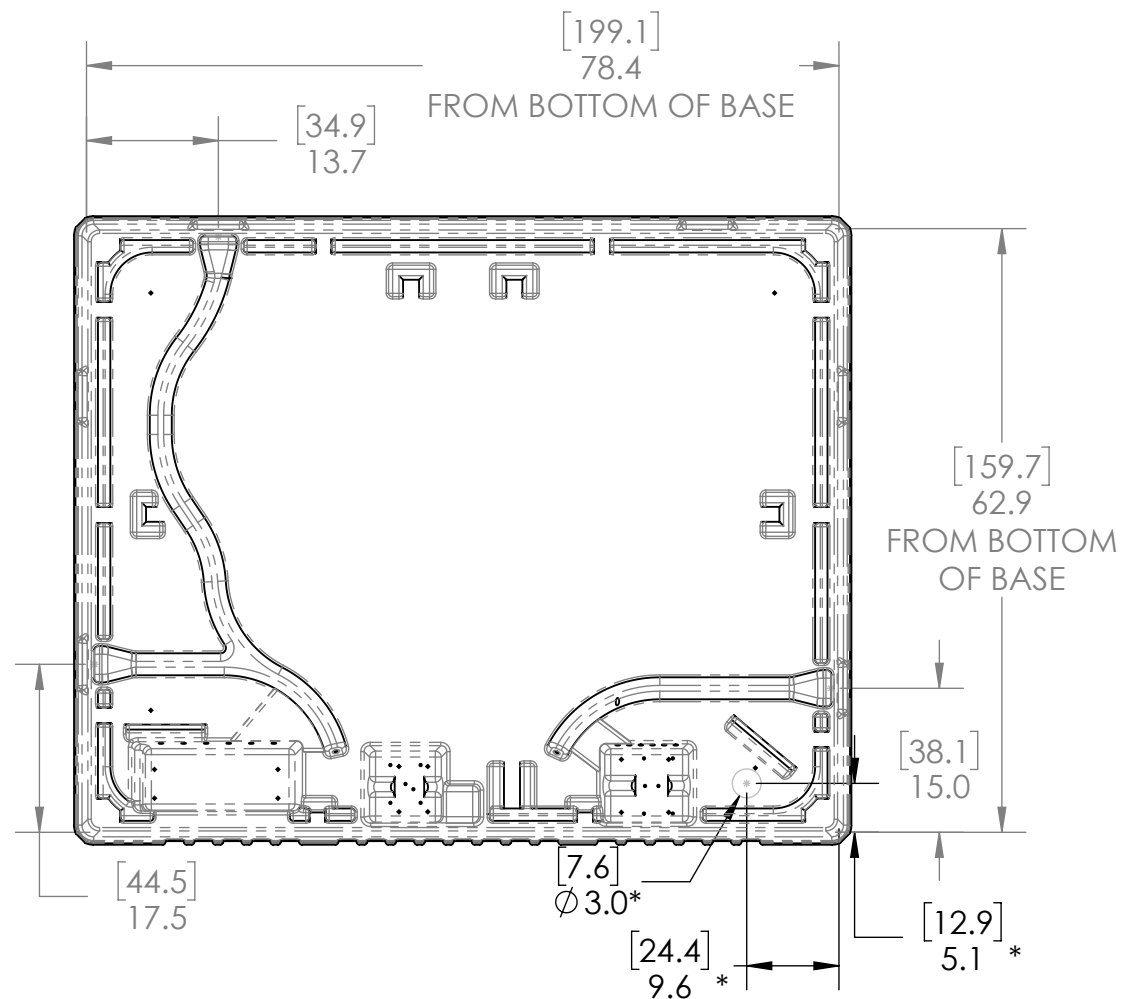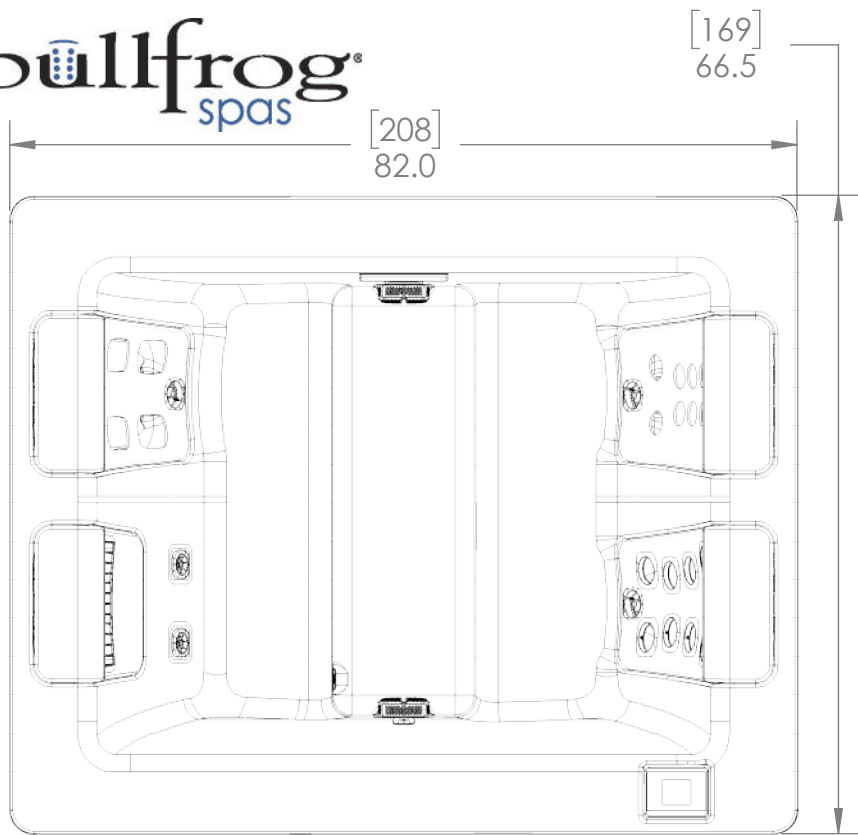

Height:
A - Overall
30.75" (78.1 cm)
B - Ground to Bottom of Lip
28.75" (73.0 cm)
C - Ground to Bottom of Cabinet
4.7" (12.0 cm)

NOTES:

DOOR ENTRY IS CENTERED ON
THE FRONT OF THE SPA WITH THE
FOLLOWING SPAN: 77.0" [195.6]

*INTERNAL ELECTRICAL STUB-UP

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

230 VAC, 50 Hz, 16A x 1

230 VAC, 50 Hz, 16A x 2

230 VAC, 50 Hz, 32 A

400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

120 VAC, 60Hz, 20 A

240 VAC, 60Hz, 30 A

240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE
PREFERRED FULL FUNCTIONALITY SETUPS. OTHER
SET-UPS MAY RESULT IN OPERATION LIMITATIONS.
CONTACT YOUR DEALER FOR DETAILS.

STIL5